


TERMINAL EXPLANATION

INPUT	L (LIVE LINE)	BLACK
	N (NEUTRAL LINE)	WHITE
	FG (FRAME GROUND)	GREEN/YELLOW
OUTPUT	+ OUTPUT	RED
	- OUTPUT	BLACK

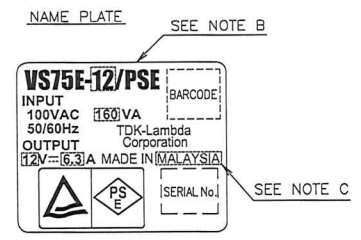

- NOTES
- A: 4x $\phi$ 3.5 HOLES AND 4xR1.75 SLOT HOLES ARE FOR CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.
  - B: MODEL NAME, INPUT VOLTAGE, APPARENT POWER, NOMINAL OUTPUT VOLTAGE, AND MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
  - C: COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.

SCALE FOR NAME PLATE : 4/1

(unit : mm)

FNAME  
REVDATE  
USER

変更箇所	変更年月日	詳細	承認	寸法(mm)	42×62×192	定格入力電圧	AC 90~110 V	単位 : mm/mm	
△				質量(g)	490	定格入力電流	1.6 A	名称	PSE適合電源 TLVS75E-12/PSE
△				メーカー型式	VS75E-12/PSE	最大出力電力	75.6 W	型番	TLVS75E-12/PSE 縮尺 Free
△						最大出力電圧	12 V	トライト株式会社 承認 検図 製図 図番 TLVS75E-12/PSE-19-02/△ 2019年02月09日	
△						最大出力電流	6.3 A		
△						効率	85 %		