
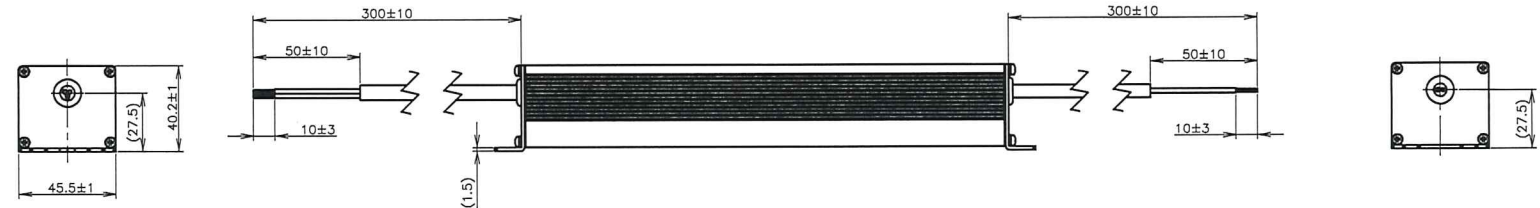


PSE適合電源 [IP66] (入力 AC100 ~ 200V 対応)

TLELV電源 DC24Vシリーズ 図面

製品型番

- TLELV60-24-5R0
- TLELV90-24-7R5

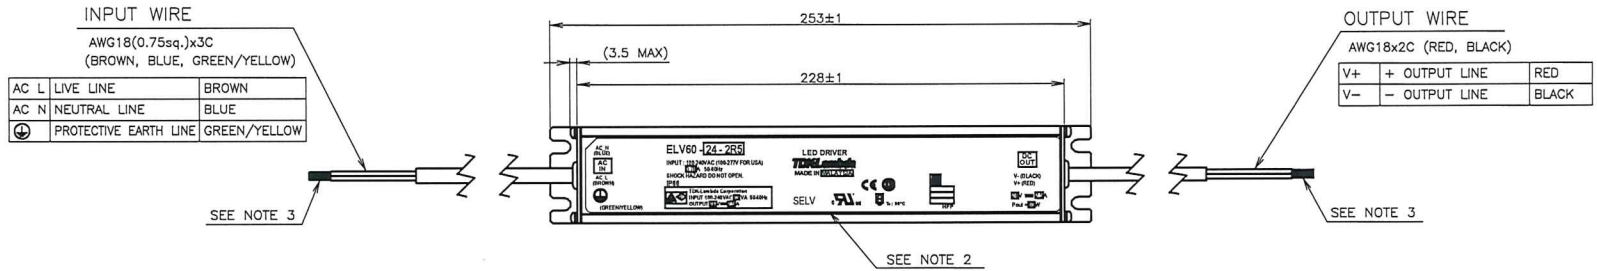

- NOTE:
- 1 4xR3.0 SLOT ARE FOR CUSTOMER MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.
 - 2 MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
 - 3 INPUT WIRE & OUTPUT WIRE ARE SOLDER FINISHED.

(unit : mm)




MODEL NAME	ELV60
TDK-Lambda	
V004-02-01C	

単位 : mm / mm

仕様図面

変更箇所	変更年月日	詳細	寸法 (mm)	40.2×45.5×253.0	定格入力電圧	AC100~200V	名称	PSE適合電源[IP66]				
△			質量 (g)	830	定格入力電流	0.78A<100V>		TLELV60-24-2R5				
△			メーカー型式	ELV60-24-2R5	最大出力電力	60.0W	型番	TLELV60-24-2R5	縮尺 Free			
△					定格出力電圧	24.0V	井上 武橋 トライライト株式会社					
△					最大出力電流	2.5A						
△					効率	84%<100V>	承認	検図	製図	図番	TLELV60-24-2R5-20-03	2020年04月20日

FNAME
REVDATE
USER

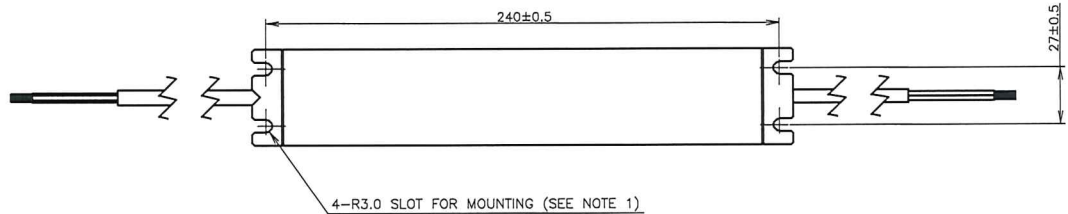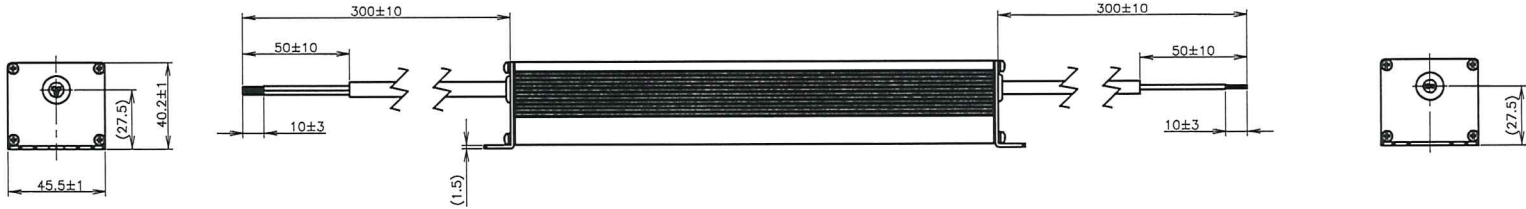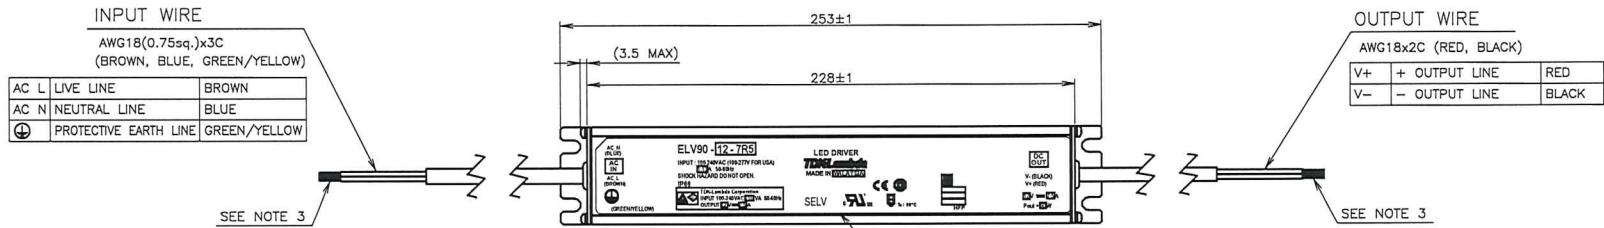

NOTE:

- 4xR3.0 SLOT ARE FOR CUSTOMER MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.
- MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- INPUT WIRE & OUTPUT WIRE ARE SOLDER FINISHED.

(unit : mm)

MODEL NAME	ELV90
TDK-Lambda	
V006-02-01C	

単位 : mm / mm

仕様図面

変更箇所	変更年月日	詳細	寸法 (mm)	40.2×45.5×253.0	定格入力電圧	AC100~200V	名称	PSE適合電源[IP66]	
△			質量 (g)	830	定格入力電流	1.13A<100V>		TLELV90-24-3R8	
△			メーカー型式	ELV90-24-3R8	最大出力電力	91.2W	型番	TLELV90-24-3R8	縮尺 Free
△					定格出力電圧	24.0V	井上 武部 橋本	トライト株式会社	
△					最大出力電流	3.8A		承認	検図
△					効率	85%<100V>	図番	TLELV90-24-3R8-20-03	2020年04月20日

FNAME

REV/DATE

USER