





PSE準拠電源（入力 AC100 ～ 200V 対応）

TLHWS電源 DC24Vシリーズ 図面

製品型番

- TLHWS30A-24/A
- TLHWS60A-24/A
- TLHWS100A-24/A
- TLHWS150A-24/A

tlight

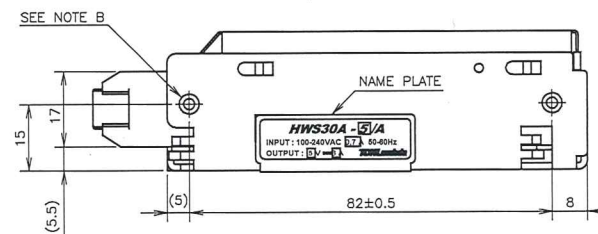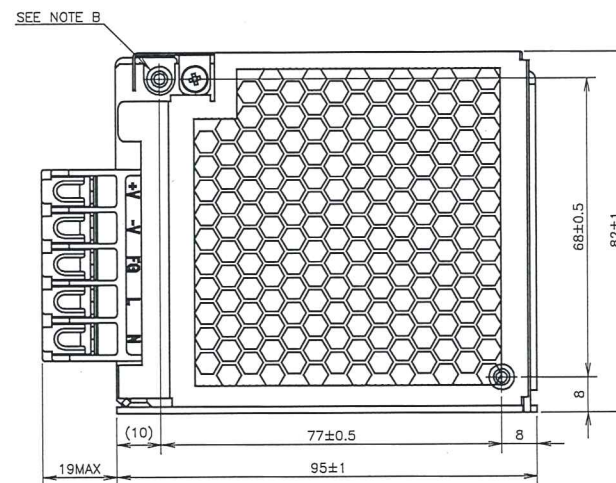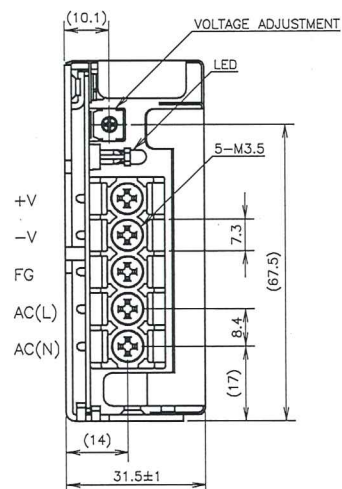

NOTES



- A : MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B : M3 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (4) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6mm.

(unit : mm)	
MODEL NAME	HWS30A/A
TDK-Lambda	
A256-02-01/A	

単位 : mm / mm

仕様図面


変更箇所	変更年月日	詳細	寸法 (mm)	31.5×82.0×95.0	定格入力電圧	AC100~200V	名称	PSE準拠電源 TLHWS30A-24/A												
△			質量 (g)	240	定格入力電流	0.65A<100V>	井上 武部 橋本 <td rowspan="5">承認</td> <td rowspan="5">検図</td> <td rowspan="5">製図</td> <td rowspan="5">図番</td> <td rowspan="5">TLHWS30A-24/A-20-03</td> <td rowspan="5">△</td> <td rowspan="5">2020年03月20日</td>	承認	検図	製図	図番	TLHWS30A-24/A-20-03	△	2020年03月20日						
△			メーカー型式	HWS30A-24/A	最大出力電力	31.2W									型番	TLHWS30A-24/A	縮尺	Free		
△					定格出力電圧	24.0V									トライト株式会社					
△					最大出力電流	1.3A														
△					効率	86%(100V)														

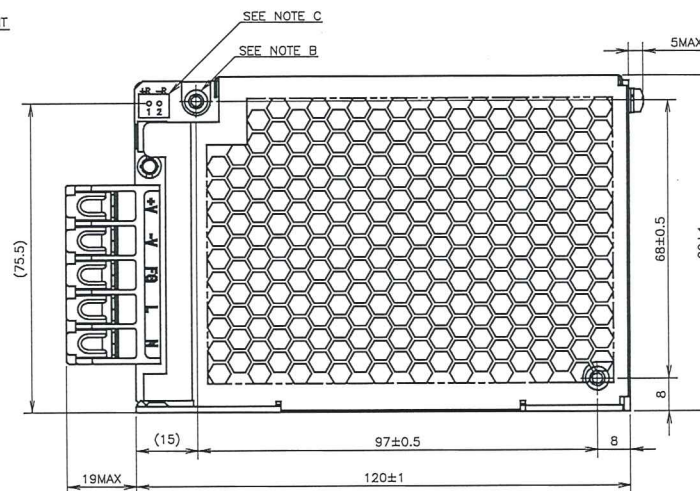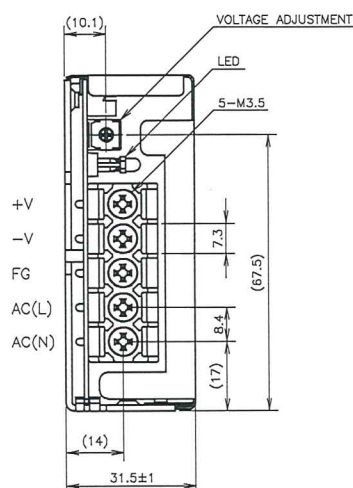

NOTES

- A : MODEL NAME, OPTION CODE, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B : M3 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (4) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6mm.
- C : REMOTE ON/OFF CONTROL CONNECTOR --- OPTION B2B-XH-AM (JST)
 MATCHING HOUSING : XHP-2 (JST)
 MATCHING TERMINAL PIN : BXH-001T-P0.6 (JST) OR SXH-001T-P0.6 (JST)
 HAND CRIMPING TOOL : YC-110R (JST) OR YRS-110 (JST)
 MATCHING HOUSING AND TERMINAL PIN --- NOT INCLUDED WITH THE PRODUCT


NAME PLATE



SEE NOTE A

OPTION CODE

SEE NOTE B

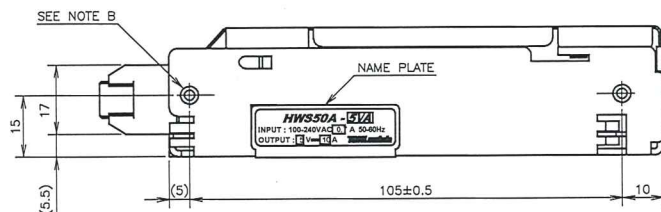

OPTIONAL MODELS


MODEL	COVER	REMOTE ON/OFF CONTROL
HWS50A-*/A	○	—
HWS50A-*/RA	○	○

(unit : mm)	
MODEL NAME	HWS50A/A
TDK-Lambda	
AZ57-02-01/A	

単位 : mm/mm

仕様図面

変更箇所	変更年月日	詳細	寸法 (mm)	31.5×82.0×120.0	定格入力電圧	AC100~200V	名称	PSE準拠電源	
△			質量 (g)	300	定格入力電流	0.65A<100V>	型番	TLHWS50A-24/A	
△			メーカー型式	HWS50A-24/A	最大出力電力	52.8W	備考	TLHWS50A-24/A	Free
△					定格出力電圧	24.0V	井上 武部 橋本 トライト株式会社		
△					最大出力電流	2.2A			
△					効率	84%<100V>			
						承認	検図	製図	図番
						TLHWS50A-24/A-20-03 △ 2020年03月20日			

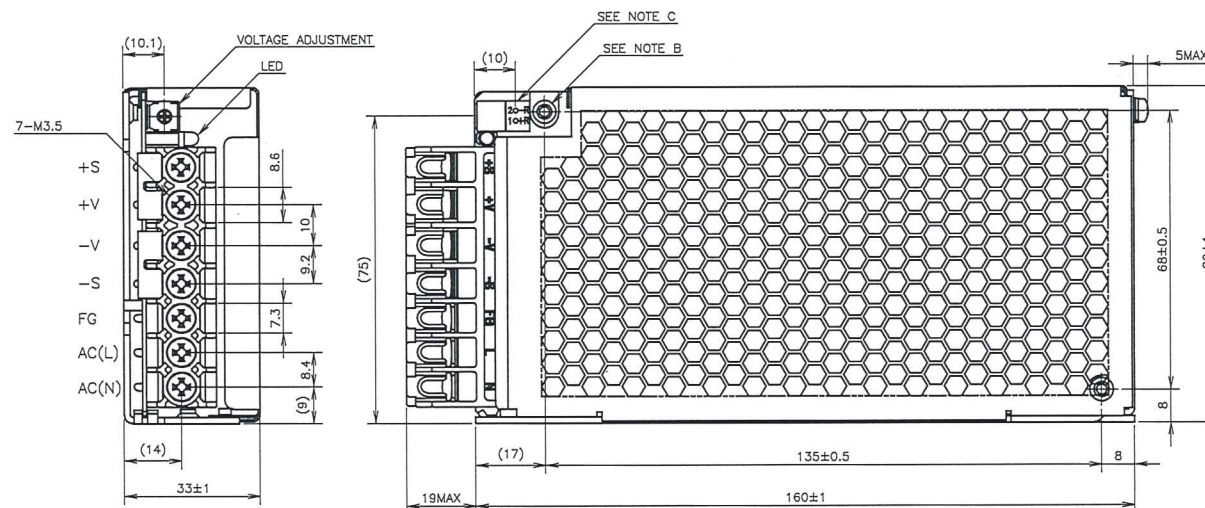

NOTES



- A : MODEL NAME, OPTION CODE, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B : M3 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (4) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6mm.
- C : REMOTE ON/OFF CONTROL CONNECTOR --- OPTION B2B-XH-AM (JST)
 MATCHING HOUSING : XHP-2 (JST)
 MATCHING TERMINAL PIN : BXH-001T-P0.6 (JST) OR SXH-001T-P0.6 (JST)
 HAND CRIMPING TOOL : YC-110R (JST) OR YRS-110 (JST)
 MATCHING HOUSING AND TERMINAL PIN --- NOT INCLUDED WITH THE PRODUCT

ACCESSORIES

- * SHORT PIECE (NET 2) FOR SHORTING PURPOSE (+S~+V, -S~-V) : MOUNTED AT TIME OF SHIPMENT.

OPTIONAL MODELS

MODEL	COVER	REMOTE ON/OFF CONTROL
HWS100A-* /A	○	—
HWS100A-* /RA	○	○

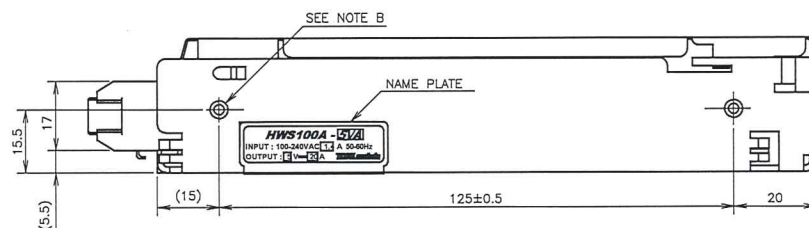


(unit : mm)	
MODEL NAME	HWS100A/A
TDK-Lambda	
A258-02-01/A	

単位 : mm / mm

仕様図面

変更箇所	変更年月日	詳細	寸法 (mm)	33.0×82.0×160.0	定格入力電圧	AC100~200V	名称	PSE準拠電源	
△			質量 (g)	470	定格入力電流	1.3A(100V)	型番	TLHWS100A-24/A	
△			メーカー型式	HWS100A-24/A	最大出力電力	108.0W	承認	検査	Free
△					定格出力電圧	24.0V	製造	トライツ株式会社	
△					最大出力電流	4.5A	図番	TLHWS100A-24/A-20-03	
△					効率	87%(100V)	日付	2020年03月20日	

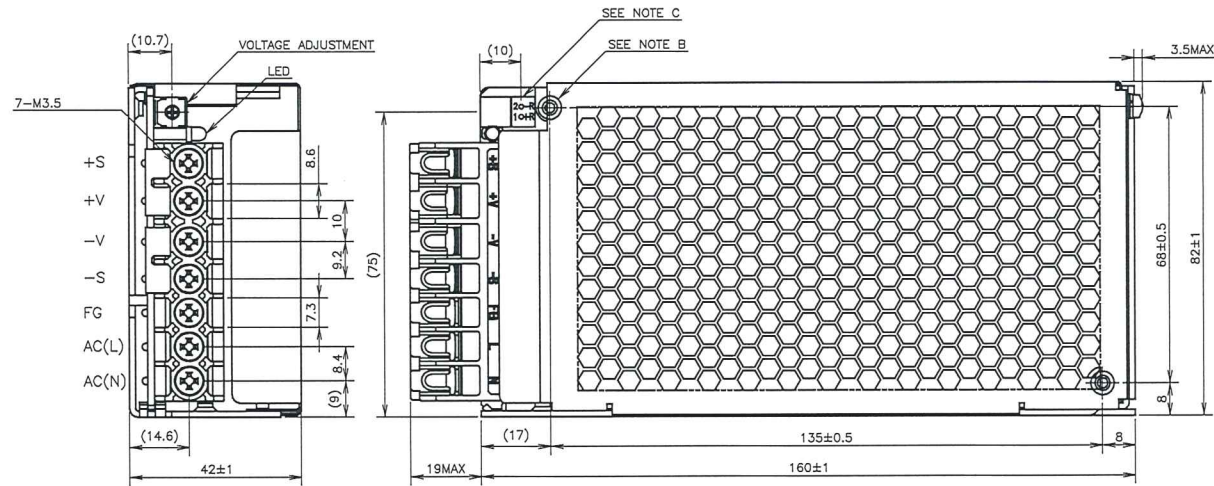

NOTES

- A : MODEL NAME, OPTION CODE, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B : M3 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (4) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6mm.
- C: REMOTE ON/OFF CONTROL CONNECTOR ---- OPTION B2B-XH-AM (JST)
 MATCHING HOUSING : XHP-2 (JST)
 MATCHING TERMINAL PIN : BXH-001T-P0.6 (JST) OR SXH-001T-P0.6 (JST)
 HAND CRIMPING TOOL : YC-110R (JST) OR YRS-110 (JST)
 MATCHING HOUSING AND TERMINAL PIN ---- NOT INCLUDED WITH THE PRODUCT

ACCESSORIES

- * SHORT PIECE (NET 2) FOR SHORTING PURPOSE (+S~+V, -S~-V) : MOUNTED AT TIME OF SHIPMENT.

OPTIONAL MODELS

MODEL	COVER	REMOTE ON/OFF CONTROL
HWS150A-*/A	○	—
HWS150A-*/RA	○	○

(unit : mm)	
MODEL NAME	HWS150A/A
TDK-Lambda	
A259-02-01/A	

単位 : mm/mm

仕様図面

変更箇所	変更年月日	詳 細	寸法 (mm)	42.0×82.0×160.0	定格入力電圧	AC100~200V	名称	PSE準拠電源		
△			質量 (g)	520	定格入力電流	1.9A(100V)		TLHWS150A-24/A		
△			メーカー型式	HWS150A-24/A	最大出力電力	156.0W	型番	TLHWS150A-24/A	超尺	Free
△					定格出力電圧	24.0V	井上 武部 橋本	トライト株式会社		
△					最大出力電流	6.5A				
△					効率	88%(100V)	承認	検図	製図	図番
								TLHWS150A-24/A-20-03	△	2020年03月20日